

TELESIN

For HERO 12/11/10/9/8/MAX


Camera Remote Control

T10遥控器




User Guide/使用说明

Wearing The Remote

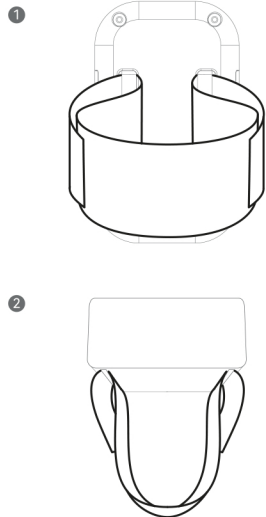

The Basics

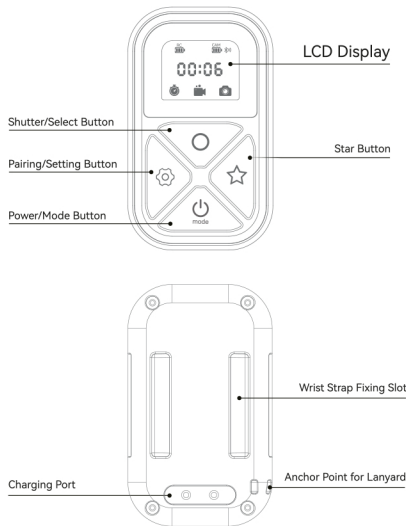

LCD Display

RC	Remote Control Battery		Time Lapse
CAM	Camera Battery		Video
	Bluetooth		Photo
00:06	Recording Time/ Number of Videos/Photos		

Button

- Shutter/Select Button**
 - 1 Short Press: Shoot photo, turn on/off recording
 - 3S Long Press: Enter phone pairing mode, only photo function in phone mode, Bluetooth name is "T-10"
- Star Button**
 - When in the three main modes "Video", "Photo", "Time-lapse"
 - 3S Long Press: Set the current main mode to "Quick mode"
 - 1S Short Press: Enter to the "Quick mode"
- Mode Button [Power/Mode Switching]**
 - 2S Long Press: Power On
 - 3S Long Press: Power Off
 - 1S Short Press: Mode Switching

(After pairing, you can control the camera on and off)
- Setting Button [Pairing, small mode switching]**
 - 1 Short Press: The camera switches among the sub-modes.

Pairing

- Setting Button 3S Long Press**: The remote control enters pairing mode, and the Bluetooth indicator flashes
- Camera Settings**: Select Connections > Connected Devices > Remote Control. Put the camera into pairing mode. Wait for a successful pairing message to appear on the camera screen.

* If the pairing fails, select Reset Connection in the camera settings and repeat the process.

If the camera has already been paired, you don't need to pair it again when you connect the remote control next time, just make sure the wireless connection of the camera has been turned on, and it will be connected automatically after a few moments. When the camera is not used for a long time, the wireless connection may be turned off completely, so please unplug the camera battery and plug it back in to activate the wireless connection.

Pair up to 5

- Cameras mode**: In the state of the first camera connected, long press the [pairing button 3 seconds remote control Bluetooth [indicator] flashing, you can connect the second camera and so on, the maximum number of connected 5
- Status Display**: The display status of the first camera connected
- Power On/Off**: All the connected cameras can be controlled at the same time to [On/Shutdown]

Charging

Plug the charging cable into the charging slot. Connect the other end of the cable to a computer or other USB power source



Charging Time 2.5h Usage Time 10h

! Please keep the charging device away from metal objects to prevent fire caused by short circuit.

* When charging, the screen lights up and the power indicator starts to work

Electricity Level

Remaining Power	CAM Display	RC Display
0~5	Side Blinking	Side Always On
5~24	Side Always On	
25~49	1/3 Power	1/3 Power
50~74	2/3 Power	2/3 Power
75~100	Full Power	Full Power

Disclaimer

Please read this Disclaimer carefully. Using this product means that you acknowledge and accept the terms of this disclaimer. By using this product, you hereby acknowledge and agree that you are solely responsible for your own conduct when using this product and any consequences thereof. You agree to use this product only for proper and lawful purposes. You understand and agree that Telesin Digital Ltd. (hereinafter referred to as 'Telesin') accepts no liability for any and all misuse, consequences, damages, injuries, penalties, or any other legal responsibility directly or indirectly incurred by your using this product and associated accessories. Before every use, make sure that your accessories are functioning properly. If there's any damage or irregularity, stop using them immediately. Within the scope of state laws and regulations, Telesin reserves the right of final explanation and revision for the commitment.