

物料编码: B6-TD374-004

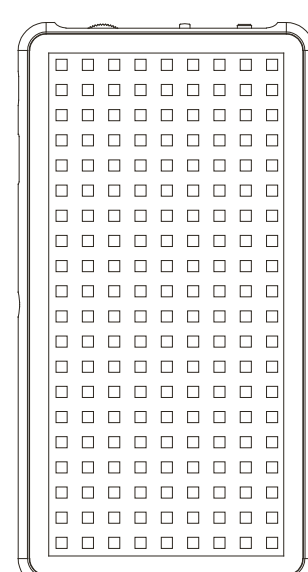
尺寸: 90x140mm


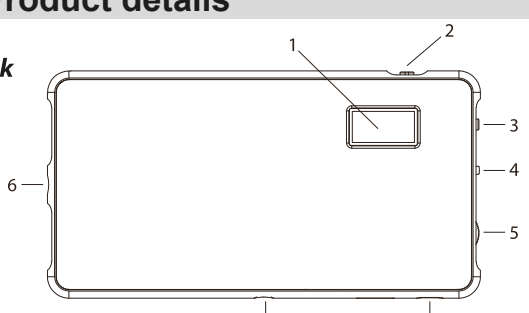
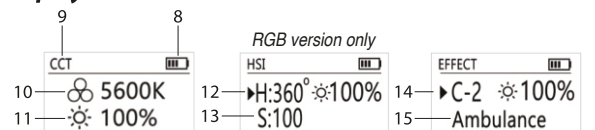



材质: 105g双铜 折页 单色双面印刷

MG-L05 & MG-L05-RGB

FOR SLA027A & SLA027R

v1.0 - 13-04-2024

<h3>5. Safety instructions</h3> <ul style="list-style-type: none">Avoid shining the LED directly into people's eyes from close proximity. This may cause short-term vision issues. This can cause short-term vision issues.Do not use the light near explosive gases or flammable materials.Do not burn or incinerate the product.Do not expose the lamp to excessive heat, such as direct sunlight or fire. The product should not be used when the temperature is above 40°C.This product is not fully waterproof. Please pay attention when using in wet conditions.Do not charge the light in damp or wet conditions.Keep out of reach of children. <h3>Battery instructions</h3> <ul style="list-style-type: none">This product contains a rechargeable lithium battery. To charge the battery, please use a suitable charger.Rechargeable lithium batteries have a limited lifespan. Over time, the capacity of the battery will decrease.If you haven't used the product for a long time, please charge the battery before using the product.To extend the lifespan of the battery, it's recommended to charge the light once every three months.For optimal performance, it is recommended not to use the light while it's charging.	<h3>6. Technical details</h3> <p>Max. Power 12W Color Temperature 2500K~9000K (adjustable in steps of 100K) Light beads Bicolor version: 90 warm, 90 cold LEDs RGB version: 45 warm, 45 cold, 45 RGB LEDs Brightness Control 1%~100% Max. Brightness 660 lumen (9000K) Color rendering index 96+ Battery Capacity 4000mAh (14,8 Wh) Input USB-C 5V=2A Dimension 15,1 x 7,9 x 1,1 cm Weight 216 grams</p> <h3>5. About MOJOGEAR</h3> <p>MOJOGEAR</p> <p>MOJOGEAR develops high-quality products for smartphone filmmakers, mobile creators and everyone else who wants to get the most out of their phone or camera. MOJOGEAR is proudly based in The Netherlands.</p> <p>All MOJOGEAR products are covered by a 2-year warranty.</p> <p>If you have any questions or feedback, please let us know at support@mojogear.eu. We'd love to hear from you!</p>	<p>MOJOGEAR</p> <p>LUMI LED VIDEO LIGHT</p>  <p>USER MANUAL</p>
--	--	--

<p>Thank you for choosing this MOJOGEAR video light. In this user manual you'll find all the relevant information to use your light.</p> <p>For information in other languages, please visit:</p> <p>NL FR IT PL DE ES SE TR</p>  <p>www.mojogear.eu/manuals</p> <h3>Table of contents</h3> <ol style="list-style-type: none">Box contentsProduct detailsHow to useSafety instructionsTechnical detailsAbout MOJOGEAR <h3>1. Box contents</h3> <ul style="list-style-type: none">Video lightUSB-C charging cableCold shoe adapterManual	<h3>2. Product details</h3> <p>Back</p>  <ol style="list-style-type: none">LCD DisplayPower SwitchMode ButtonSelect / Adjustment KnobBrightness Knob1/4" Screw HolesUSB-C Charging Port <p>Display</p>  <ol style="list-style-type: none">Battery StatusColor Hue (HSI)Mode Selected (CCT / HSI / Effect)Color Saturation (HSI)Color Temperature (CCT)Effect GroupBrightness (CCT)Effect Name <h3>3. How to use</h3> <p>Turn on/off the light Slide the power button to power the light on or off.</p> <p>Mode Selection Press the Mode button to change between CCT, HSI (RGB version only) and Effect mode.</p>	<h3>3. How to use</h3> <p>CCT Mode</p> <ol style="list-style-type: none">Adjust the brightness by turning the Brightness Knob (1% to 100%).Set the color temperature using the Select / Adjustment Knob (2500K to 9000K).  <p>HSI Mode (RGB version only)</p> <ol style="list-style-type: none">Press the Select / Adjustment Knob to select H (Hue) or S (Saturation).Adjust the Hue (0° to 360°) and Saturation (0 to 100%) by turning the Select / Adjustment Knob.Adjust the brightness by turning the Brightness Knob (1% to 100%).  <p>Effect Mode:</p> <ol style="list-style-type: none">Press the Select / Adjustment Knob to select the Effect Group (A-G).To set the desired effect, turn the Select / Adjustment Knob. Each group has 3 options.Adjust the brightness by turning the Brightness Knob (1% to 100%).  <p>Charging the SLA027R Light:</p> <ol style="list-style-type: none">Connect the USB-C charging cable to the light.Plug the cable into a USB power source.The LCD display will show a flashing battery icon during charging.Charging time may vary based on the power source. <p>Note: If you power on the light while it's charging, the maximum brightness will be limited to 60%</p>
---	--	---